UPG
STAY POWERED®

12V Dual Stage Charger

UPG No. D1730

12BC0500D-1

Specification

Input Voltage	120VAC ±10%
Input Frequency	60 Hz
Output Voltage	Bulk Charge - DC 14.7V ± 0.2V Float Charge - DC 13.6V ± 0.3V
Output Current	Bulk Charge - DC 0.5ADC 0.5A
LED Status Indication	Charging - Red LED On Full Charge - Green LED On
Input Standby Power @120V	0.20W Max.
Dielectric Withstand Voltage	AC 3.0KV for 1 min. @ 5mA leakage
Insulation Resistance	100Mohm Min. at 500VDC between Primary & Secondary
Operating Temperature	-10˚C ~ +40˚C
Storage Temperature	-20˚C ~ +80˚C
Connector	Alligator Clip
Standards	ETL/cETL (UL1310), Level IV

Due to continuous improvements to our products, product may vary slightly from depiction.

Dimensions: in(mm)

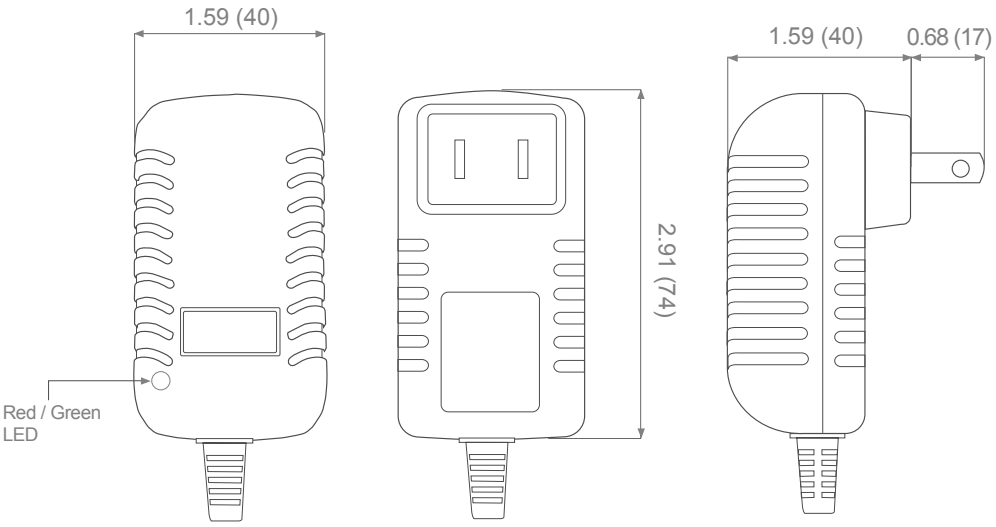

Clamshell Packaging

UPG is ISO Certified

www.upgi.com

120 Dividend Dr. Ste 100 • Coppell, Texas 75019 • Main 469.892.1122 • Toll Free 866.892.1122 • Fax 469.892.1123 • sales@upgi.com

Copyright © 2024 Universal Power Group, Inc. All rights reserved. Universal Battery® is a registered trademark of Universal Power Group. All specifications are subject to change without notice.