LEOCH BATTERY

DEEP CYCLE AGM TECHNOLOGY

DEEP CYCLE AGM BATTERY

LDC12-330-8D BCI GROUP 8D

FEATURES & BENEFITS

- True deep cycle AGM technology-GREEN SOLUTION
- Over 99.99% virgin lead for grid plate and active material
- Heavy duty grid/paste design for deep cycle application
- Maintenance free, non-spillable, valve-regulated
- Double separator configuration:long cycle life & High energy density and super anti-vibration design
- Low self-discharge for longer shelf life

ELECTRICAL SPECIFICATIONS

Voltage(V)	Capacity (AH)					Reserve Capacity (Min)		
	100HR	20HR	10HR	5HR	3HR	@25A	@56A	@75A
12	355	330	308	280	268	740	/	207

PHYSICAL SPECIFICATIONS

Model	Dimensions (mm/inches)				Weight (kg/lbs)	Terminal Type (Standard)	Case Material
	Length	Width	Height	Total Height			
LDC12-330-8D	527 (20.75)	280 (11.02)	230 (9.06)	252 (9.92)	86.0 (189.6)	DT-3/8	PP

Operating Temperature Range		
Discharge	Charge	Storage
-15℃~50℃(5℉~122℉)	0℃~40℃(32℉~104℉)	-15℃~40℃(5℉~104℉)

Intertek ETL SEMKO CE Battery Council ISSA MEMBER EMC tested TS16949 ISO14001 ISO9001 OHSAS18001

DEEP CYCLE AGM BATTERY

LDC12-330-8D

DIMENSIONS

DT-3/8 Terminal

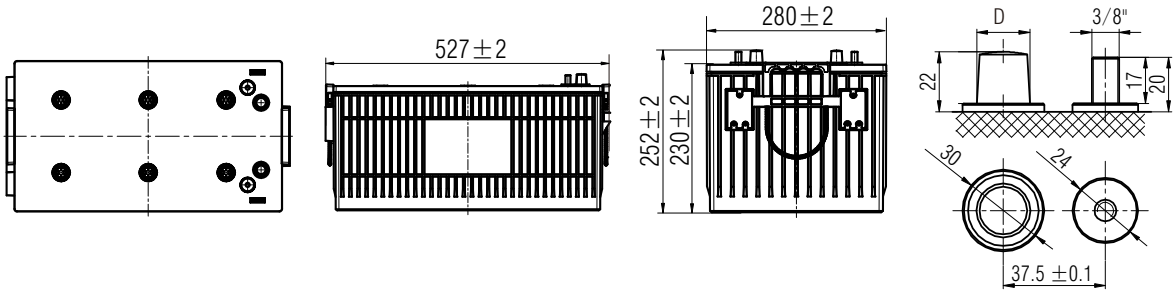

Note: D:Positive 19.5 $^{0}_{-0.3}$, D:Negative 17.9 $^{0}_{-0.3}$; Terminal Torque Values in-lb(Nm) : 176-203(20-23)

PERFORMANCE CHARACTERISTICS

LEOCH LDC AGM Charging Profile

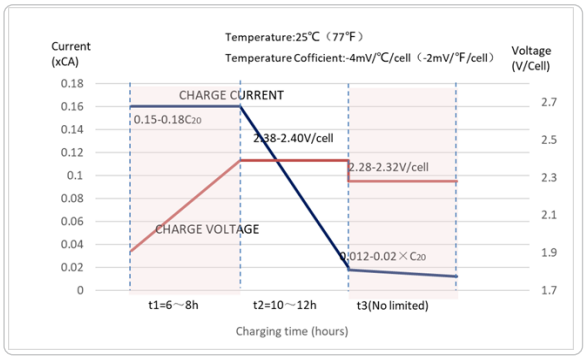

Relationship of OCV and State Of Charge (25℃,77℉)

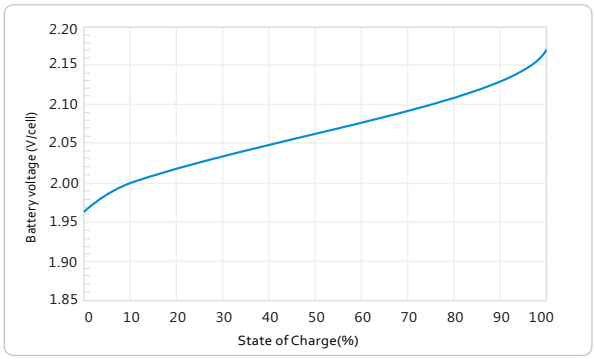

Cycle life in relation to Depth Of Discharge

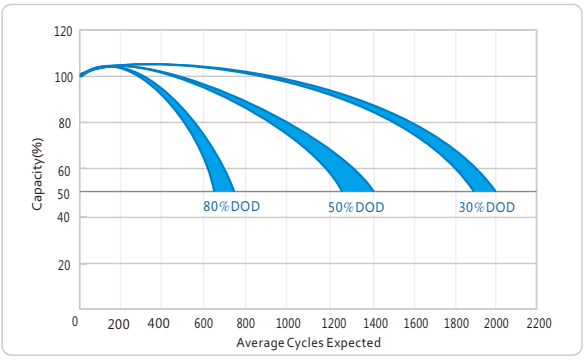

Self-discharge Characteristic

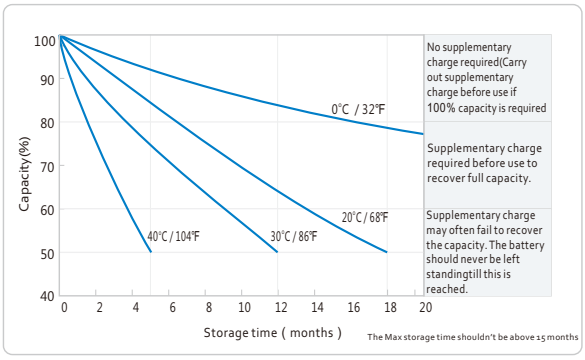

● **LEOCH BATTERY CORP. USA:**
19751 Descartes, Foothill Ranch, CA 92610 USA
Tel: 949-588-5853 E-mail: sales@leoch.us

© 2018 LEOCH. All rights reserved.Trademarks and logos are the property of LEOCH and its affiliates unless otherwise noted.Subject to revisions without prior notice.

Publication No: LB-AGM-US-201803